

DATASHEET



KEY FEATURES

Trimble Floodlight satellite shadow reduction technology

More positions and increased accuracy in tough environments

Work your way

Choose your configuration, data collector, and software

Real-time decimeter accuracy

Confidence in the data you collect in the field

Rugged design, built for the field

Works in the harsh physical environments you work

Field-swappable battery

All day operation and the convenience of swap-and-go battery replacement



TRIMBLE PRODUCTIVITY, YOUR WAY


With the flexibility to do it all, Trimble® Pro series receivers deliver unparalleled freedom of choice in professional GIS data collection. As the next generation of the Trimble GPS Pathfinder® family, the Trimble Pro series lets you configure a solution to match a wide range of work situations:

- Handheld or tablet data collector
- Real-time or postprocessed workflows
- Connectivity via Bluetooth®, serial, or USB to external devices
- In a backpack, on a pole, or mounted on a vehicle

With the Trimble Pro series receiver collect data your way, while maintaining the high-accuracy and position availability you need to stay productive.

Dedicated to GIS data collection

Trimble Pro series receivers are built to withstand the rigors of long hours in tough outdoor conditions yet optimized for high-accuracy GIS data collection workflows. The integrated antenna reduces the complexity of the complete system for fast setup and swift data collection campaigns. Field workers can be up and running with minimal training saving time and money.

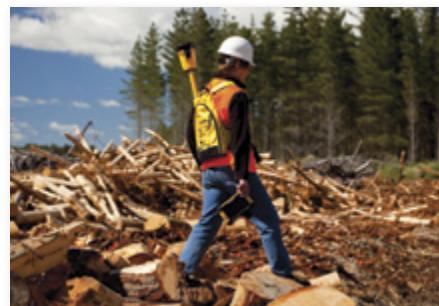


Trimble Pro series receivers improve GNSS productivity with Trimble Floodlight™ technology for improved satellite availability and Trimble H-Star™ technology for high-accuracy data logging. The Trimble Pro series

can deliver down to decimeter accuracy—either postprocessed or in real time for the confidence the job is done right while still on site. Using Trimble TerraSync™ software in the field or other GIS-centric field workflows, Trimble Pro receivers are designed to deliver attribute-rich field data quickly and easily.

Stay out of the shadows with Trimble Floodlight

For maximum productivity in high-accuracy applications, Trimble Floodlight technology lets you take high-accuracy data collection into the toughest GNSS environments. Trees and buildings create “satellite shadows”, limiting the areas where you can reliably collect high-accuracy GNSS data. Using Floodlight technology, the Pro series keeps your teams productive without reducing accuracy. Work with fewer disruptions and ensure better data, faster data collection and higher field efficiency.

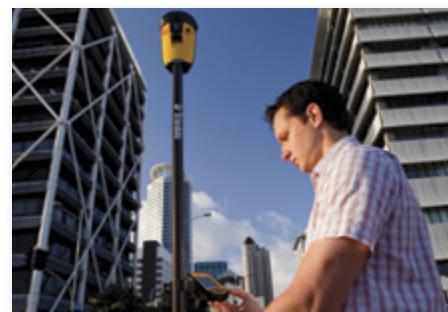

Flexible to fit with the way you work

With your preferred configuration, choice of real-time or postprocessed workflows, decimeter or subfoot accuracy-levels, and optional Floodlight technology—Trimble Pro series receivers enable you to work productively how and where you need to.



TRIMBLE PRO SERIES

PRODUCT MODELS

	Pro 6H	Pro 6T
Accuracy	Decimeter	Submeter
Floodlight	Yes	Optional

GNSS

Receiver	Trimble Maxwell™ 6 GNSS chipset
Channels	220 channels
Systems	GPS, GLONASS, WAAS/EGNOS/MSAS
Update rate	1 Hz
Time to first fix	.45 s (typical)
NMEA-0183 support	Optional
Trimble Floodlight technology	Optional
RTCM support	RTCM2.x/RTCM3.x
CMR support	.CMR/CMR+/CMRx

Trimble Pro 6T receiver

GPS	L1C/A
GLONASS	.L1C/A, L1P

Trimble Pro 6H receiver

GPS	L1C/A, L2C, L2E
GLONASS	L1C/A, L1P, L2C/A, L2P

GNSS ACCURACY¹

Real-time DGNSS (Horizontal RMS)

Code	.75 cm + 1.0 ppm
SBAS ² (WAAS/EGNOS/MSAS)	Typically < 1 m

Real-time and postprocessed H-Star (Horizontal RMS)
(Trimble Pro 6H configurations)

Horizontal	10 cm + 1.0 ppm
------------	-----------------

Postprocessed DGNSS (Horizontal RMS)

Code	50 cm + 1.0 ppm
Carrier (after 45 minutes)	1 cm + 2.0 ppm

TEMPERATURE (MIL-STD-810G)

Operation	-20 °C to +60 °C (-4 °F to +140 °F)
Storage	-30 °C to +70 °C (-22 °F to +158 °F)

ENVIRONMENTAL (MIL-STD-810G)

Drop shock	1.2 m (4 ft) to plywood over concrete
Functional shock	Method 516.6 Procedure I
Accidental drop on pole	2 m (6.56 ft)
Vibration	Method 514.5 Procedure I Category 24
Relative humidity	95% non-condensing
Altitude rating	Method 500.5
Maximum storage altitude	12,192 m (40,000 ft)
Maximum operational altitude	9,000 m (29,520 ft)
Chemical exposure	Method 504.1 Procedure I
Salt Mist	Method 509.5

INGRESS PROTECTION

Water/Dust	IP65
------------	------

© 2012, Trimble Navigation Limited. All rights reserved. Trimble, the Globe & Triangle logo, and GPS Pathfinder are trademarks of Trimble Navigation Limited, registered in the United States and in other countries. Floodlight, GPS Analyst, GPScorrect, H-Star, Maxwell, Positions, Tempest, TerraSync, and Tornado are trademarks of Trimble Navigation Limited. The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Trimble Navigation Limited is under license. All other trademarks are the property of their respective owners. PN 022501-289 (04/12)

SIZE AND WEIGHT

Height	204 mm (8 in)
Diameter	138 mm (5.4 in)
Weight (inc. battery)	1040 g (2.3 lb)

BATTERY

Type	Rechargeable, removable Li-Ion
Capacity	11.1 V 2.5 AH
Charge time	4 hours (typical)

BATTERY RUN TIME³

Typical	> 12 hours
---------	------------

CONNECTORS & INPUTS

- Mini USB connector
- External power connector
- DE-9 serial connector
- External antenna connector

WIRELESS

Bluetooth ⁴	Version 2.1 + EDR
------------------------	-------------------

IN THE BOX

- Trimble Pro series receiver
- AC Power adaptor
- Serial cable

- Rechargeable battery pack
- USB data cable
- Documentation

OPTIONAL ACCESSORIES

- Trimble Tornado™ external GNSS antenna (Pro 6H receiver)
- Trimble Tempest™ external GNSS antenna (Pro 6T receiver)
- 1.5 m & 5 m external antenna cable
- Backpack kit for external antenna
- Vehicle power supply

SOFTWARE COMPATIBILITY

- Trimble TerraSync software
- Trimble GPScorrect™ extension for Esri ArcPad software
- Trimble GPS Controller software
- Trimble GNSS Connector software
- Trimble GPS Pathfinder Office software
- Trimble GPS Analyst™ extension for Esri ArcGIS for Desktop software
- Trimble GPS Pathfinder Field Toolkit application
- Trimble Positions™ toolkit applications
- Third party NMEA-based applications

¹ Accuracy and reliability may be subject to anomalies due to multipath, obstructions, satellite geometry, and atmospheric conditions. Always follow recommended GNSS data collection practices. Specified Centimeter accuracy can normally be achieved for baselines of 30 km or less. Specified H-Star accuracy can normally be achieved for baseline lengths of 100 km or less. Centimeter and H-Star accuracy is typically achieved within 2 minutes. Carrier postprocessed accuracy is limited to data collected within 10 km of the base station used for corrections.

² SBAS (Satellite Based Augmentation System). Includes WAAS; available in North America only, EGNOS; available in Europe only and MSAS; available in Japan only.

³ Actual run time will vary with conditions and environment of use.

⁴ Bluetooth type approvals are country specific. Pro series receivers have Bluetooth approval in the U.S. and in most European countries. For further information please consult your local reseller.

Specifications subject to change without notice.



NORTH & SOUTH AMERICA

Trimble Navigation Limited
10355 Westmoor Drive
Suite #100
Westminster, CO 80021
USA
+1-720-587-4574 Phone
+1-720-587-4878 Fax

EUROPE & AFRICA

Trimble Germany GmbH
Am Prime Parc 11
65479 Raunheim
GERMANY
+49-6142-2100-0 Phone
+49-6142-2100-550 Fax

ASIA-PACIFIC & MIDDLE EAST

Trimble Navigation
Singapore PTE Limited
80 Marine Parade Road
#22-06 Parkway Parade
Singapore, 449269
SINGAPORE
+65-6348-2212 Phone
+65-6348-2232 Fax

